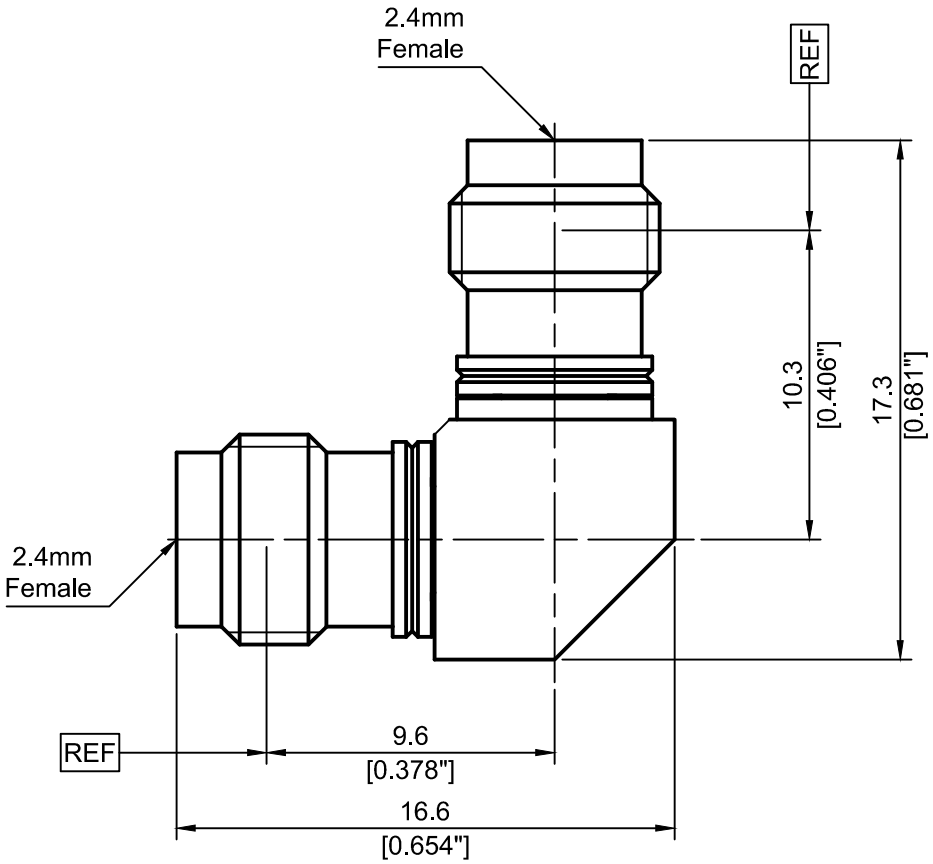


## Performance Features:

Nominal Impedance:50Ω
Frequency Range:DC-50GHz
VSWR:DC-50GHz.... 1.40:1 (Max)

## Materials/Finishes:

Housing:Stainless Steel,Passivated
Center Contact:Beryllium Copper,Gold Plated
Insulators:PEI

ALLWIN TECHNOLOGY
4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALLWINTEK.COM

PROPRIETARY INFORMATION: THE INFORMATION WHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

| LTR | DESCRIPTION | DATE | APPR. |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

DIRECTION OF VIEW

UNIT: mm

| | |
|---|---|
| DRAWN | PingWang |
| CHECKED | Shaoqin Du |
| APPR. | Dong Wu |

UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ±0.2, ANGLE TOLERANCES ±1°
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING. SURFACE FINISHED

DO NOT SCALE DRAWING

TITLE
# 2.4-KWK Adapter

DWG NO.
Z373700W01

OUTLINE DRAWING

SIZE A4_a | SCALE 4:1 | REV. V2.0 | SHEET 1/1