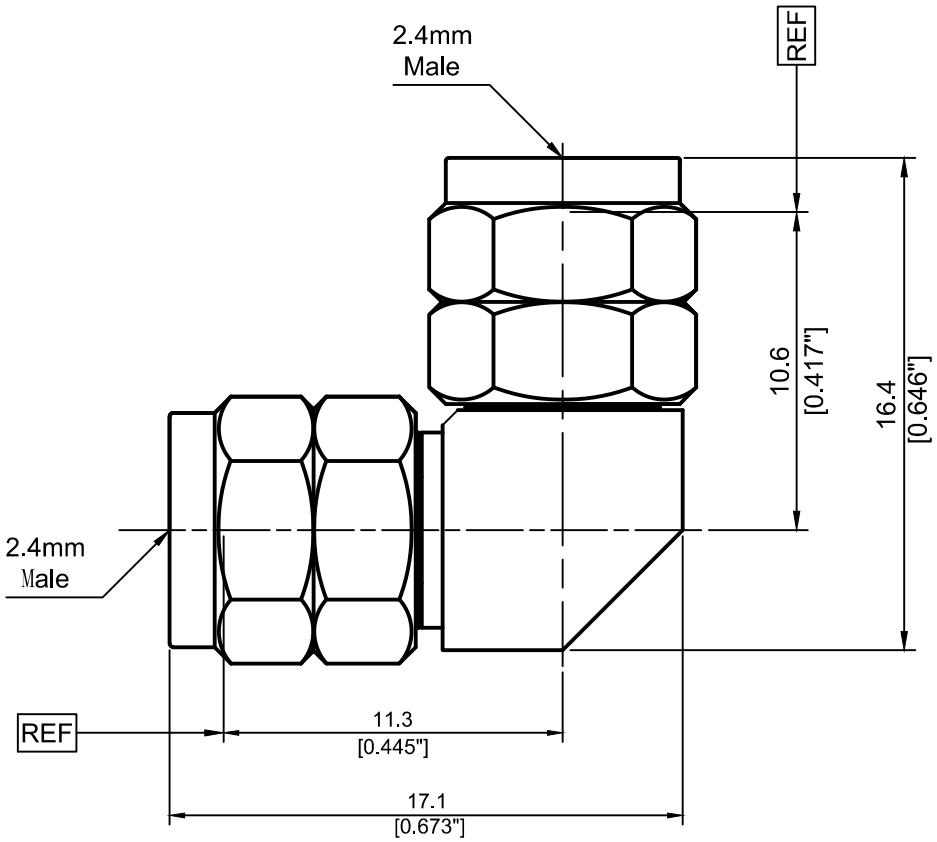

Performance Features:

Nominal Impedance:50Ω
Frequency Range:DC-50GHz
VSWR:DC-50GHz.... 1.40:1 (Max)

Materials/Finishes:

Housing:Stainless Steel,Passivated
Center Contact:Beryllium Copper,Gold Plated
Insulators:PEI

ALLWIN TECHNOLOGY
4th Floor, West Unit, Incubation Building 1 Guanghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALLWINTEK.COM

PROPRIETARY INFORMATION: THE INFORMATION WHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DIRECTION OF VIEW

UNIT: mm

DRAWN	PingWang
CHECKED	Shaoqin Du
APPR.	Dong Wu

UNLESS OTHERWISE SPECIFIDE
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ±0.2, ANGLE TOLERANCES ±1°
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING. SURFACE FINESHED

DO NOT SCALE DRAWING

LTR	DESCRIPTION	DATE	APPR.

TITLE: 2.4-JWJ Adapter

DWG NO. Z373711W01

OUTLINE DRAWING

SIZE	SCALE	REV.	SHEET
A4_a	4:1	V2.0	1/1