

1

2

3

4

5

6

A


A

B

B

C

C

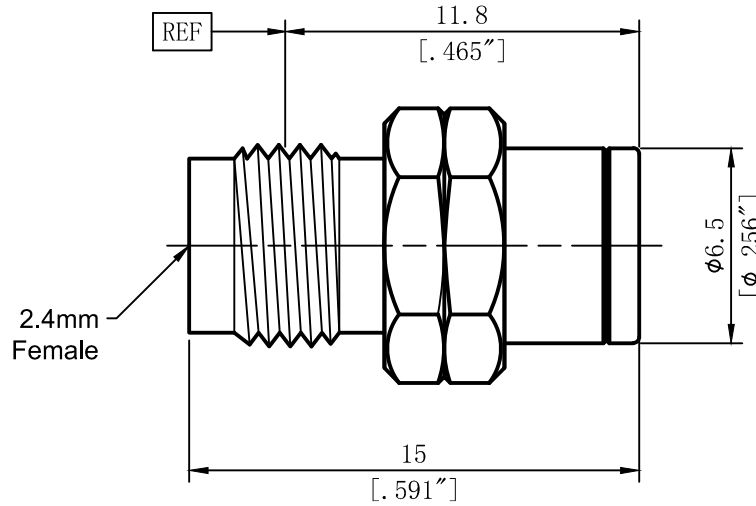

Performance Features:

Nominal Impedance: 50Ω
 Frequency Range: DC-50GHz
 VSWR: 1.35:1 (Max)
 Power Handling: 1W

Materials/Finishes:


Housing: Stainless Steel, Passivated
 Center Contact: Beryllium Copper, Gold Plated
 Insulators: PEI



4th Floor, West Unit,
 Incubation Building 1
 Guanghua Lu, Nanjing
 TEL: 025-84304950
 FAX: 025-84304959
 WWW.ALLWINTEK.COM

PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DIRECTION OF VIEW



UNIT

mm

TITLE

2.4-K Load

DRAWN Ping Wang

CHECKED Shaoqin Du

APPR. Dong Wu

DWG NO.

T370P1Z01H

UNLESS OTHERWISE SPECIFIED:
 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
 2. LINEARITY TOLERANCES ±0.2, ANGLE TOLERANCES ±1°
 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

OUTLINE DRAWING

LTR	DESCRIPTION	DATE	APPR.

DO NOT SCALE DRAWING

SIZE A4 a

SCALE 4:1

REV. V2.0

SHEET 1/1

1

2

5

6

D

D