

1 2 3 4 5 6

A


A

B


B

C

C

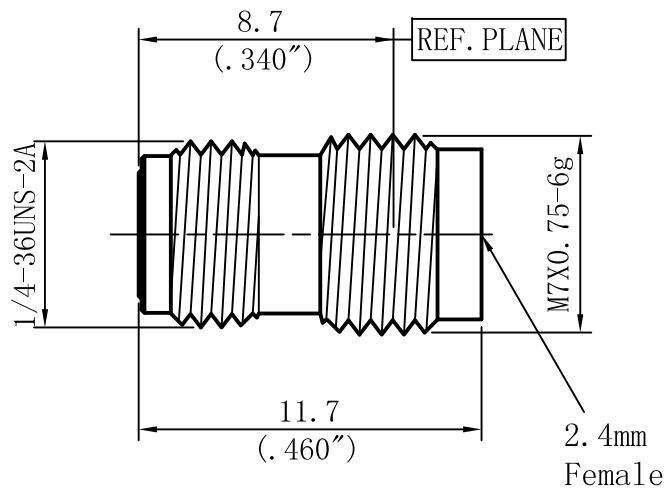

SOCKET TO ACCEPT $\phi 0.51(.020)$ PIN
2(.079) MAX DEPTH



Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators:PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALLWINTEK.COM

DIRECTION OF VIEW



UNIT

mm

TITLE

2.4mm Connector

PROPRIETARY INFORMATION: THE INFORMATION WHEN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DRAWN Xin Gong
CHECKED Haimin Zhang
APPR. Gang Cao

DWG NO.

D370S20Y01

UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ± 0.1 , ANGLE TOLERANCES $\pm 1^\circ$
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓

OUTLINE DRAWING

LTR	DESCRIPTION	DATE	APPR.

DO NOT SCALE DRAWING

SIZE A4_h	SCALE 4:1	REV. V2.0	SHEET 1/1
-----------	-----------	-----------	-----------

1 2 3 4 5 6