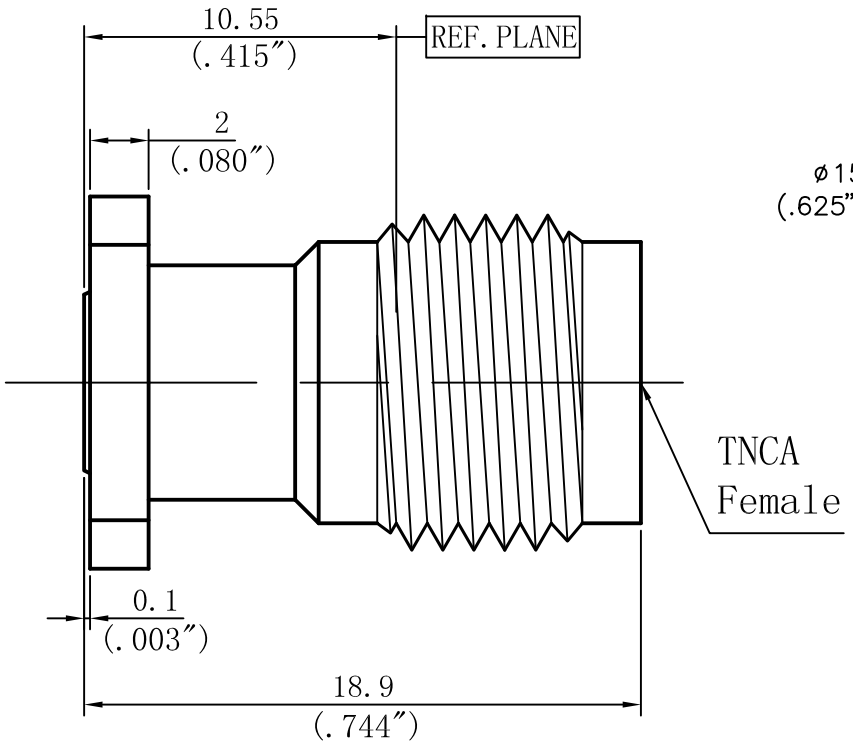

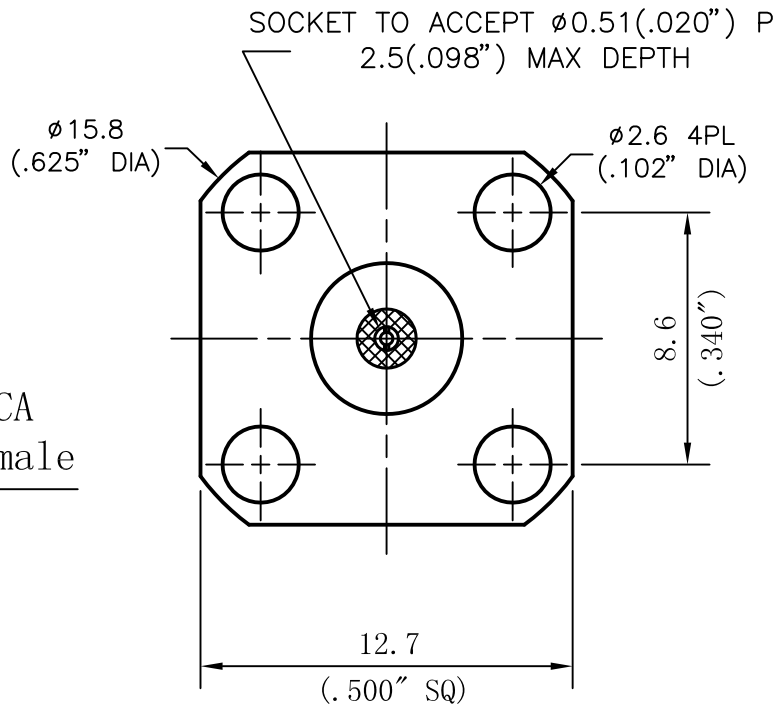

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators:PTFE&PEI

ALLWIN TECHNOLOGY
4th Floor, West Unit, Incubation Building 1
Guanghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALLWINTEK.COM

PROPRIETARY INFORMATION: THE INFORMATION WHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

LTR	DESCRIPTION	DATE	APPR.

DIRECTION OF VIEW

UNIT: mm

UNLESS OTHERWISE SPECIFIDE
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ±0.1, ANGLE TOLERANCES ±1°
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING. SURFACE FINISHED

DO NOT SCALE DRAWING

DRAWN	Shaoqing Du
CHECKED	Haimin Zhang
APPR.	Gang Cao

TITLE: TNCA Connector

DWG NO.: D540S20F01

OUTLINE DRAWING

SIZE A4_h | SCALE1:1 | REV. V2.0 | SHEET1/1